



PART NO. MD-6703173

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
A0	Initial Release for Manufacture	Jul.07.14	Tony

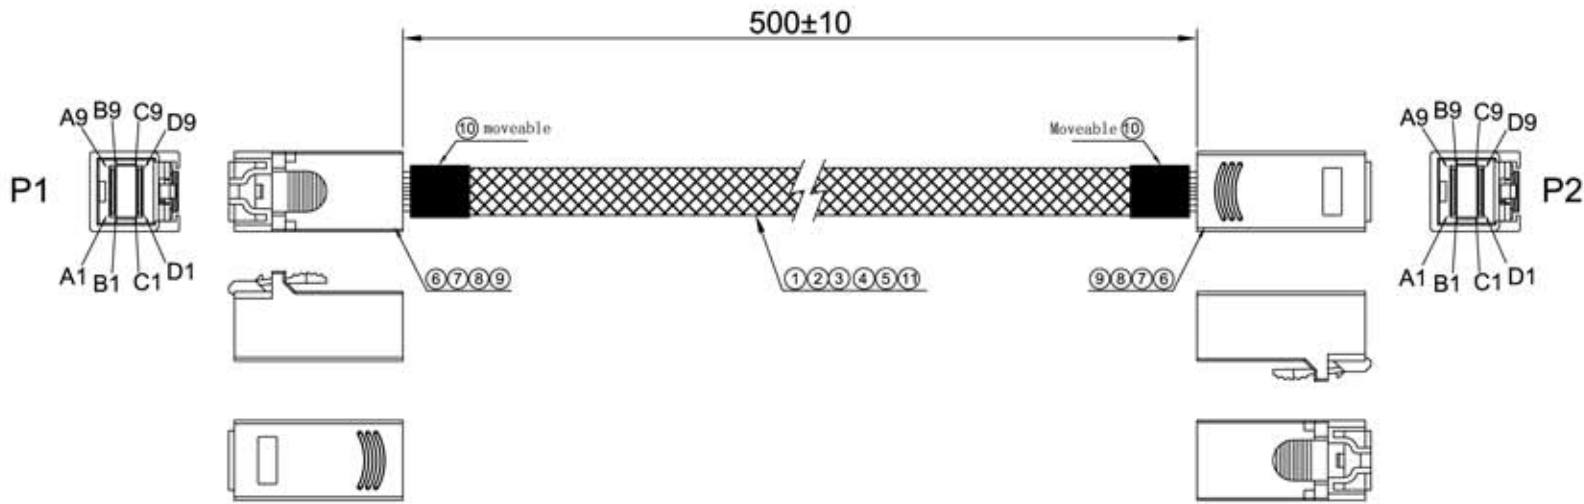

PIN ASSIGNMENT

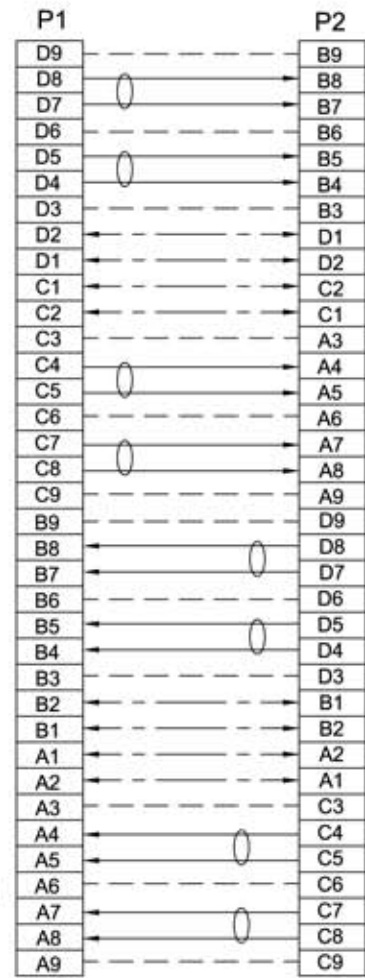

- ELECTRICAL TEST:**
1. OPEN & SHORT TEST
 2. CONNECTION RESISTANCE: 1 OHM (MAX.)
 3. INSULATION RESISTANCE: 10M OHM (MIN.)
 4. HI-POT TEST: 300V DC/10ms



Legend:
 :High-Speed Serial Differential Pairs
 :Signal Return
 :Sideband Signal

NO.	PART NO.	DESCRIPTION	Q'TY	UNIT
11	4-15-0044-001001	NYLON BRAID W=10.0MM <BLACK> 1*72	520.0	mm
10	4-20-0062-002001	ACETATE TAPE BLACK W=20mm	50.0*2	mm
9	3-03-0004-005001	PBT BLACK NON-migration(UL94V-0)	8	g
8	2-70-0018-011501	HD MINI SAS 36P SHELL 180°	2	PCS
7	2-70-0019-011502	HD MINI SAS 36P PCB/CD	2	PCS
6	2-70-0016-011501	HD MINI SAS 36P PCB/AB	2	PCS
5	1-58-0022-200209	Non-UL FLAT CABLE:30#*4C*PH:0.8mm GRAY	533.0*2	mm
4	1-61-0052-200251	2C*30#+2D+AL-MYLAR+THERMOPLASTIC-MYLAR BLUE04(Non UL)	530.0*2	mm
3	1-61-0051-200251	2C*30#+2D+AL-MYLAR+THERMOPLASTIC-MYLAR BLUE03(Non UL)	530.0*2	mm
2	1-61-0050-200251	2C*30#+2D+AL-MYLAR+THERMOPLASTIC-MYLAR BLUE02(Non UL)	530.0*2	mm
1	1-61-0049-200251	2C*30#+2D+AL-MYLAR+THERMOPLASTIC-MYLAR BLUE01(Non UL)	530.0*2	mm

CineRAID	APPROVALS	DATE	CineRAID Systems			
	DRAWN Chen.Yongfu	Jul.07.14				
CineRAID	CHECKED	DATE	HD MINI SAS 180° TO HD MINI SAS 180° CABLE 500mm			
	Zeng.wei	Jul.07.14				
CineRAID	APPROVAL	DATE	SIZE	SCALE	DRAWING NO.	REV.
	Zeng.wei	Jul.07.14	C	XX : XX	6703173	A0

DECIMALS: X ± 0.30, XX ± 0.20
 ANGLES: ± 3°
 DO NOT SCALE DRAWING

100% RoHS Compliant