


**PIN ASSIGNMENT**

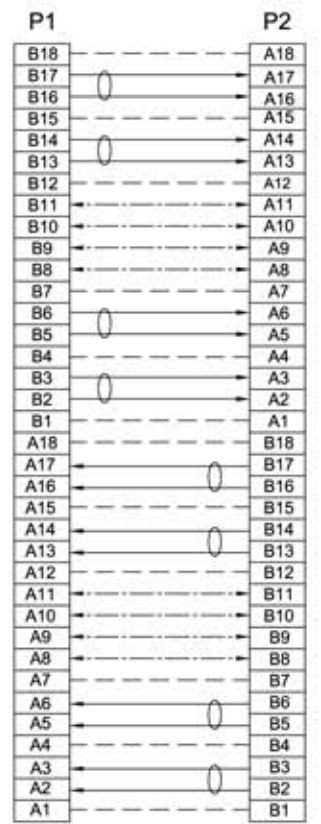

Legend:  
 :High-Speed Serial Differential Pairs  
 :Signal Return  
 :Sideband Signal

**ELECTRICAL TEST :**  
 1. CONTACT RESISTANCE: 2ohm (Max).  
 2. INSULATION RESISTANCE: 10Mgeohm (Min).  
 3. VOLTAGE: AC 300volt / 10millisecond

12	4-15-0044-001001	NYLON BRAID W=10.0mm <BLACK> 1*72	775.0	mm
11	3-01-0004-003001	PVC 30P BLACK (MINI SAS 36P Dustproof cover 2PCS)	12	g
10	4-20-0062-002001	ACETATE TAPE BLACK W=20mm	50.0*2	mm
9	2-61-A042-011501	LATCH	2	PCS
8	3-03-0002-005001	PP BLACK	12	g
7	3-02-0002-086701	TRL-THERMELT-867	4	g
6	2-70-0001-011501	MINI SAS 36P PCB	2	PCS
5	1-58-0022-200209	Non-UL FLAT CABLE:30#*4C*PH 0.8mm GRAY	783*2	mm
4	1-61-0052-200251	2C*30#+2D+AL-MYLAR+THERMOPLASTIC-MYLAR BLUE 04 (Non UL)	780*2	mm
3	1-61-0051-200251	2C*30#+2D+AL-MYLAR+THERMOPLASTIC-MYLAR BLUE 03 (Non UL)	780*2	mm
2	1-61-0050-200251	2C*30#+2D+AL-MYLAR+THERMOPLASTIC-MYLAR BLUE 02 (Non UL)	780*2	mm
1	1-61-0049-200251	2C*30#+2D+AL-MYLAR+THERMOPLASTIC-MYLAR BLUE 01 (Non UL)	780*2	mm

<b>CineRAID</b>	APPROVALS	DATE	<b>CineRAID Systems</b>					
	DRAWN					SFF8087 to SFF8087, 0.75M		
	Shi.Chao	Oct.07.14						
CHECKED			SIZE	SCALE :	DRAWING NO.	REV.		
Zeng.Wei	Oct.07.14		C	XX : XX	6703307	A0		
CHECKED			ID NO.					
Zeng.Wei	Oct.07.14					SHEET 1 OF 1		